


Lightbox frame

This frame can be used single- or double sided. You always need fabric graphic on both side (printed or unprinted), unless you will use it as a wall mounted frame on a white wall, in which case it's not necessary to use fabric on the reverse side.

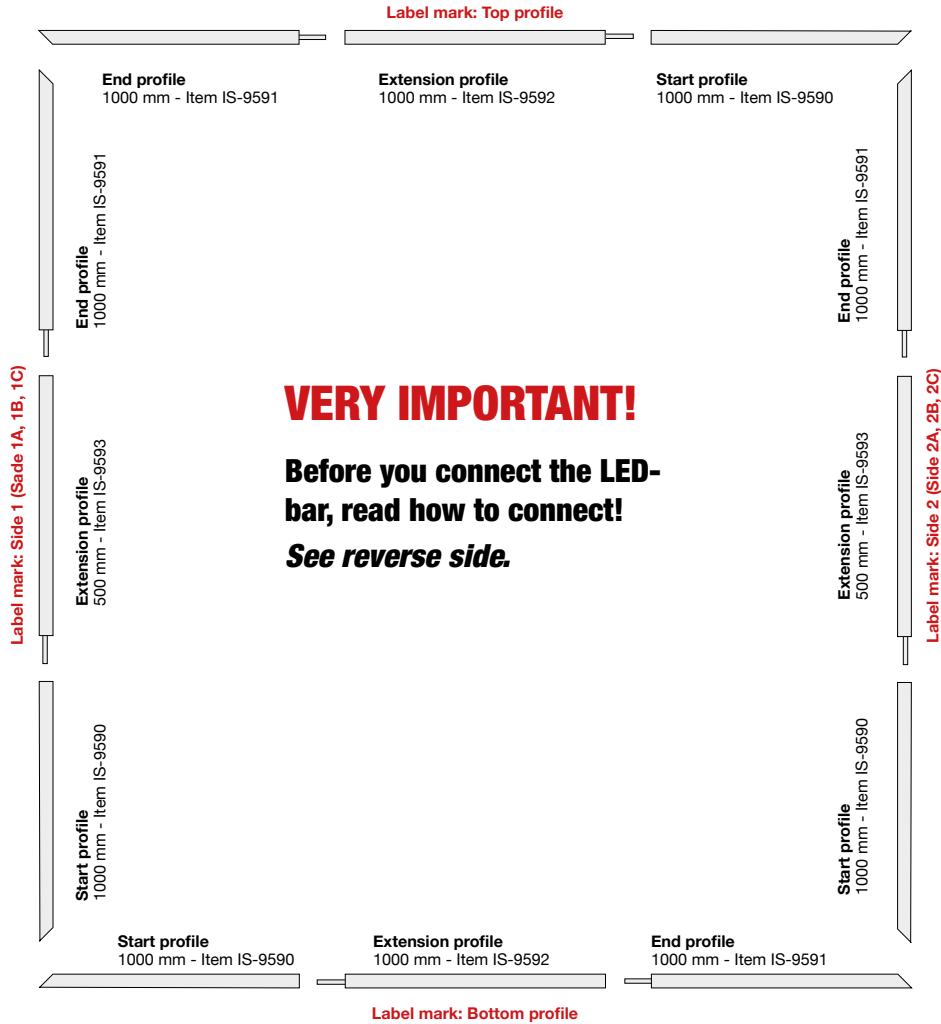

Mount the frame

You must lock all joints with screw brackets in each side.



Corner connection.



Straight connection.

Mount the feet

Item no: IS-9338 (Minimum 2 pcs.)

The frame must be drilled for the feet on the bottom profile.



1 Mount a foot in each side of the bottom profile.

Mount the LED-bar



1 Attach the bar with twist nuts into the centre slot in the profile.




2 Lock the two screws with the Allen-key.



3 Insert the adaptor cable in the hole in the profile. Each hole fits 2 cables.



4 Connect the contacts from the LED-bar to the adaptor cable.

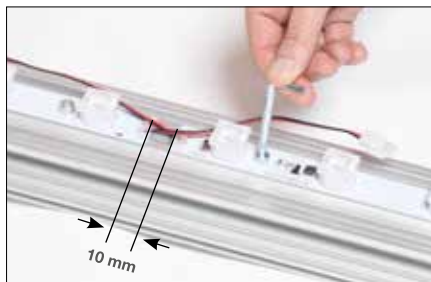

5 Add more LED-bars and connect with that before, approx 10 mm from the first one.



6 Hide the cable in the side slot and secure it with a tape.

Connect the LED-bar and transformer

Connection 250 x 300 cm

Consists of :
3 pcs. Transformer
3 pcs. Adaptor cable
28 pcs. LED bars
3 pcs. Extension cable

