


Lightbox frame

This frame can be used single- or double sided. You always need fabric graphic on both side (printed or unprinted), unless you will use it as a wall mounted frame on a white wall, in which case it's not necessary to use fabric on the reverse side.

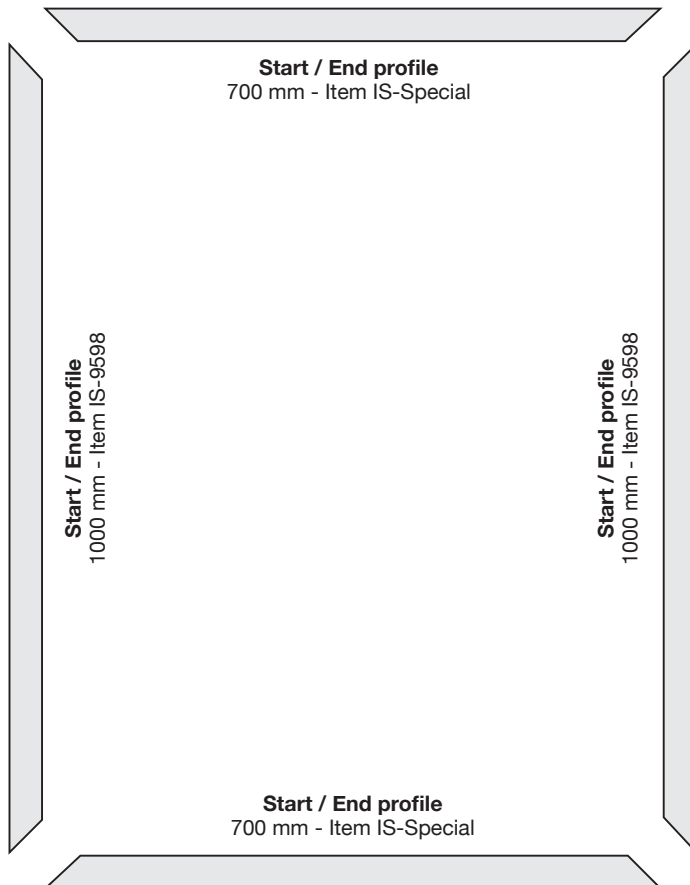

VERY IMPORTANT!

Before you connect the LED-bar, read how to connect!
See reverse side.

Mount the frame

You must lock all joints with screw brackets in each side.



Corner connection.



Straight connection.

Mount the feet

Item no: IS-9338 (Minimum 2 pcs.)
The frame must be drilled for the feet on the bottom profile.



Mount a foot in each side of the bottom profile.


Mount the LED-bar



1 Attach the bar with twist nuts into the centre slot in the profile.




2 Lock the two screws with the Allen-key.

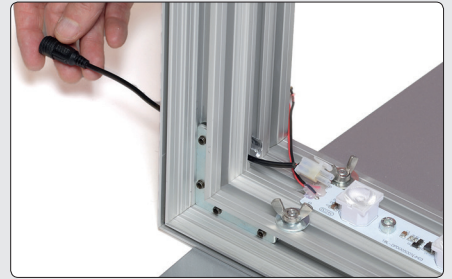


3 Insert the adaptor cable in the hole in the profile. Each hole fits 2 cables.



4 Connect the contacts from the LED-bar to the adaptor cable.

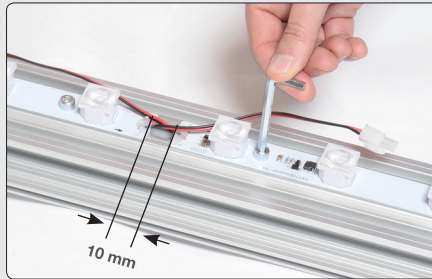

5 Add more LED-bars and connect with that before, approx 10 mm from the first one.

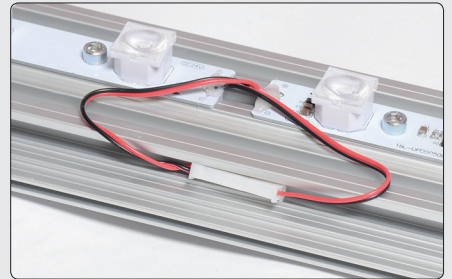


6 Hide the cable in the side slot and secure it with a tape.

Connect the LED-bar and transformer


Connection 70 x 100 cm

Consists of :

- 1 pc. Transformer
- 1 pc. Adaptor cable
- 4 pcs. LED bars
- 1 pc. Extension cable



Transformer

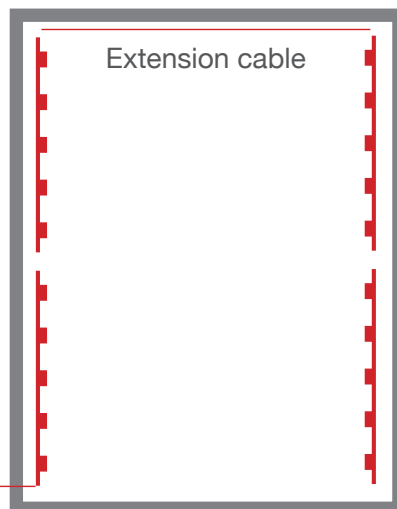

Extension cable