

Storage room with door - 800 x 1600 mm (31.5 x 63 inches)

Item.no: **Midi** IS-9421-1
Maxi IS-9421-2

Complete with:


- 1 Base post, 750 mm, adj. foot
- 1 Extension post, 750 mm
- 1 Top post, 755 mm
- 1 Base post, 750 mm
- 1 Extension post, 750 mm
- 1 Top post, 755 mm
- 2 90° corner post, Base, wave cut
- 2 90° corner post, Center, 750 mm
- 2 90° corner post, Top, 755 mm
- 2 90° corner post, Center, 850 mm
- 2 90° corner post, Top, 855 mm
- 2 Extension post, 200 mm, standard
- 1 Extension post, 200 mm, ext. Corner
- 4 Straight beam, 800
- 6 Corner trims, 750/850
- 3 Corner trims, 770
- 3 Kickers & Hangers
- 1 Door, straight

Midi IS-9421-1

- IS-0750-EBM
- IS-0750-EEM
- IS-0755-ETM
- IS-0750-BP
- IS-0750-EP
- IS-0755-TP
- IS-W750-IB90
- IS-0750-IE90
- IS-0755-IT90
- IS-800-BS
- IS-0750-CT
- IS-0770-CT
- IS-800-KHN
- IS-9458

Maxi IS-9421-2


- IS-0750-EBM
- IS-0750-EEM
- IS-0755-ETM
- IS-0750-BP
- IS-0750-EP
- IS-0755-TP
- IS-W750-IB90
- IS-0850-IE90
- IS-0855-IT90
- IS-0200-EP
- IS-0200-EEM
- IS-800-BS
- IS-0850-CT
- IS-0770-CT
- IS-800-KHN
- IS-9458

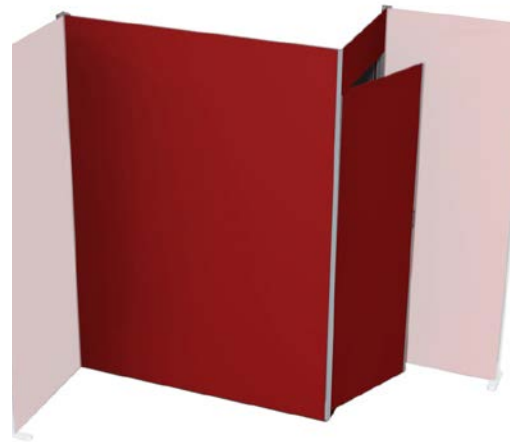

Accessories



Coat hook
with straight beam 800 mm
Item IS-9430

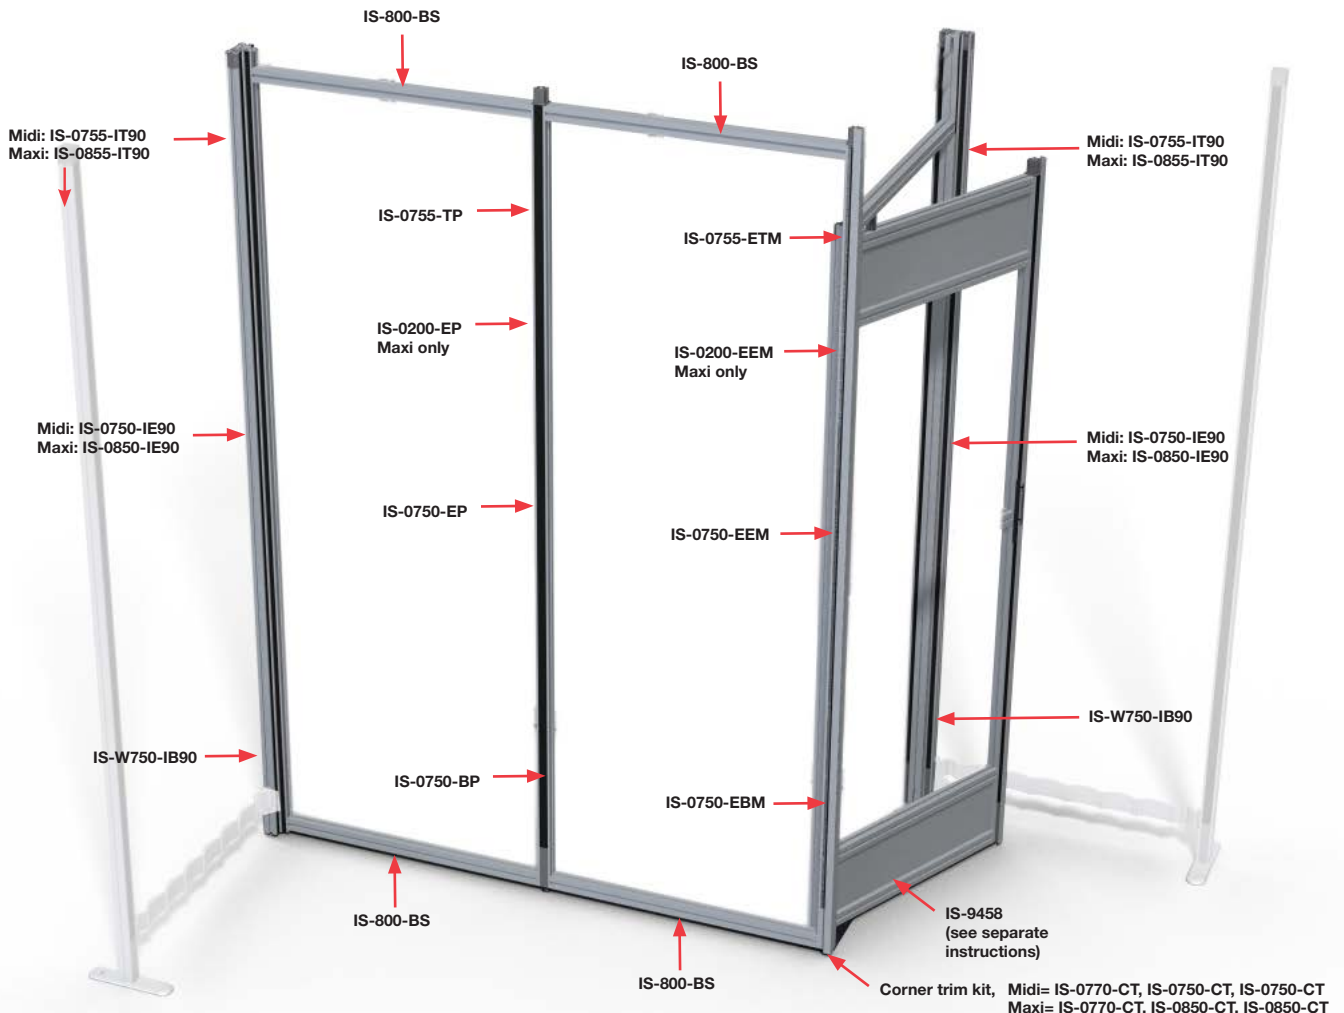

1 This unit is a 'Starter module'.
Build it first before adding/connecting the other modules in your display.


2 The door unit can be installed at any of the three positions in the module.

3 As with all fixed-beam modules, be sure to level the complete storage room module before adding your graphic panels.

4 When you are ready, you will have 2 set of corner trim left, this will be mounted in each end of the wall!


Graphic production and corner trim

for graphic production of door, see separate instruction sheet.

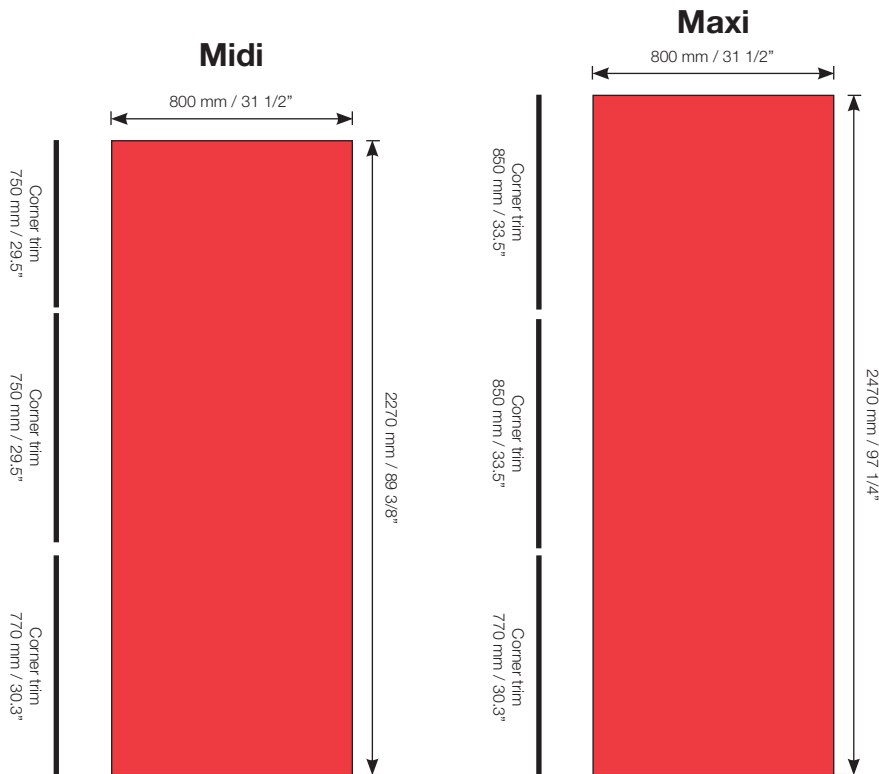

A template for the graphic panel production can be downloaded at:
<http://markbricdisplay.net/imagebank/PT-general.html>

Graphic panel attachments

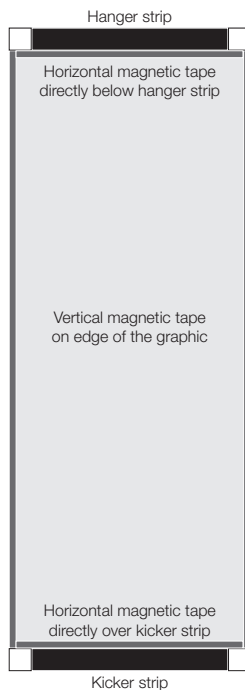

Accessories

Kickers & Hangers

(incl. for the first set of panels)
800 mm / 31 1/5" Item IS-800-KHN

Magnetic tape (not incl.)
12 mm/0.5" A tape, 30 m / 98 ft. Item 82281

Each panel needs:
Midi 6,2 m / 21 ft.
Maxi 6,6 m / 22 ft.

Printer material

We recommended the following material:

Poster paper: 180 gr / 0.4 lb.
The printed graphic panels must be laminated before use.
Front side: 125 microns (0,125 mm) / 0.005"
Reverse side: 250 microns (0,250 mm) / 0.010" "stop light"

Polyester film: 330-370 microns (0,350 mm) / 0.013-0.015"
Top laminate: 125 microns (0,125 mm) / 0.005"



Kicker



Hanger

Mounting of Kickers and Hangers

Kickers and hangers to be fixed at the bottom and at the top of the graphic panels (reverse side).

Mounting of Magnetic Tape

Magnetic tape to be fixed **horizontally** directly over/under kicker/hanger strip. Magnetic tape to be fixed **vertically** along each side of the graphic panels.

IMPORTANT Carefully mount the magnetic tape slightly inset from the edge of the graphic panel by approximately 0,25 mm / 0.010". Once mounted, a very thin straight white line should show between the edge of the graphic and the outside edge of the magnetic tape. Do not exceed 0,5 mm / 0.020".

Application Techniques

To obtain optimum adhesion, the bonding surfaces must be well unified, clean and dry. Typical surface cleaning solvents are isopropyl alcohol/water mixture (rubbing alcohol) or heptane.

Note: Be sure to follow solvent manufacturer's precautions and directions for use when using solvents.